


A2s


## RIM JOIST w/ Squash Blocks

Provide Minimum Bearing for I-Joist and Squash Block

Use double squash blocks as specified: squash blocks must be cut  $1/16$ " taller than I-Joist. 2x4 minimum

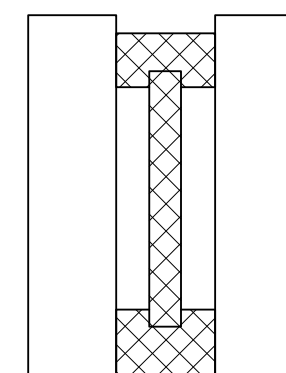

Rim joists with flanges wider than  $1-3/4$ " require a minimum 2x6 plate. Do not use rim joists with flanges wider than  $2-1/2$ "

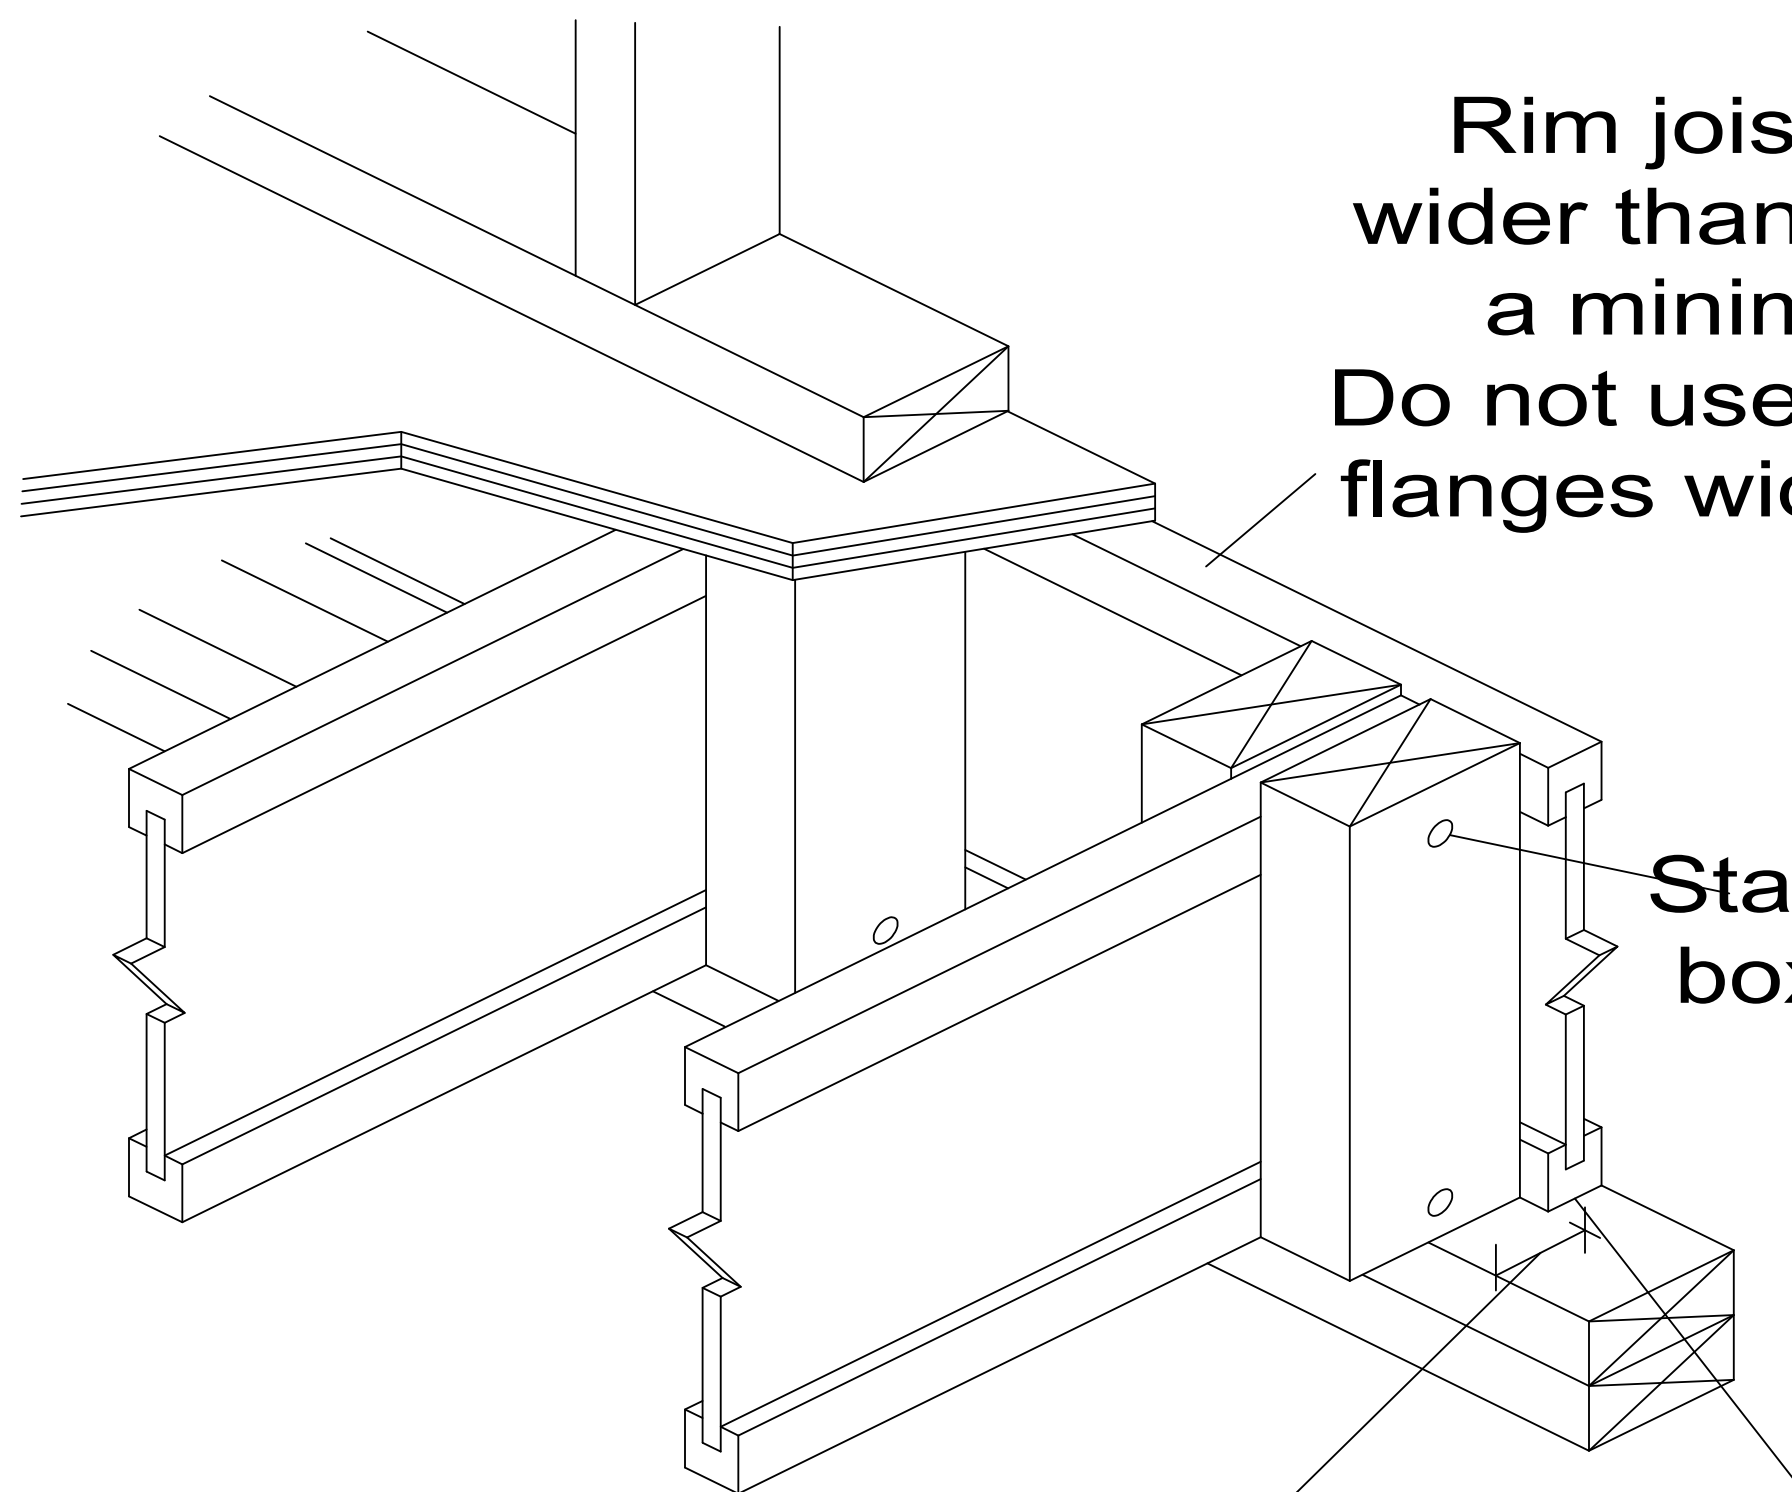

Stagger 8d or 10d box nails to avoid splitting

Fasten rim joist to each floor I-Joist with one 10d box nail into each end of the flange. Use 16d box nails for rim joists with flanges wider than  $1-3/4$ ".

Bearing Length

8d nail at 6" o.c.  
(when used for shear transfer nail to bearing plate with same nailing schedule as decking)