


P6

Side Loaded Beam

Verify hanger,
stiffener, and
filler requirements.

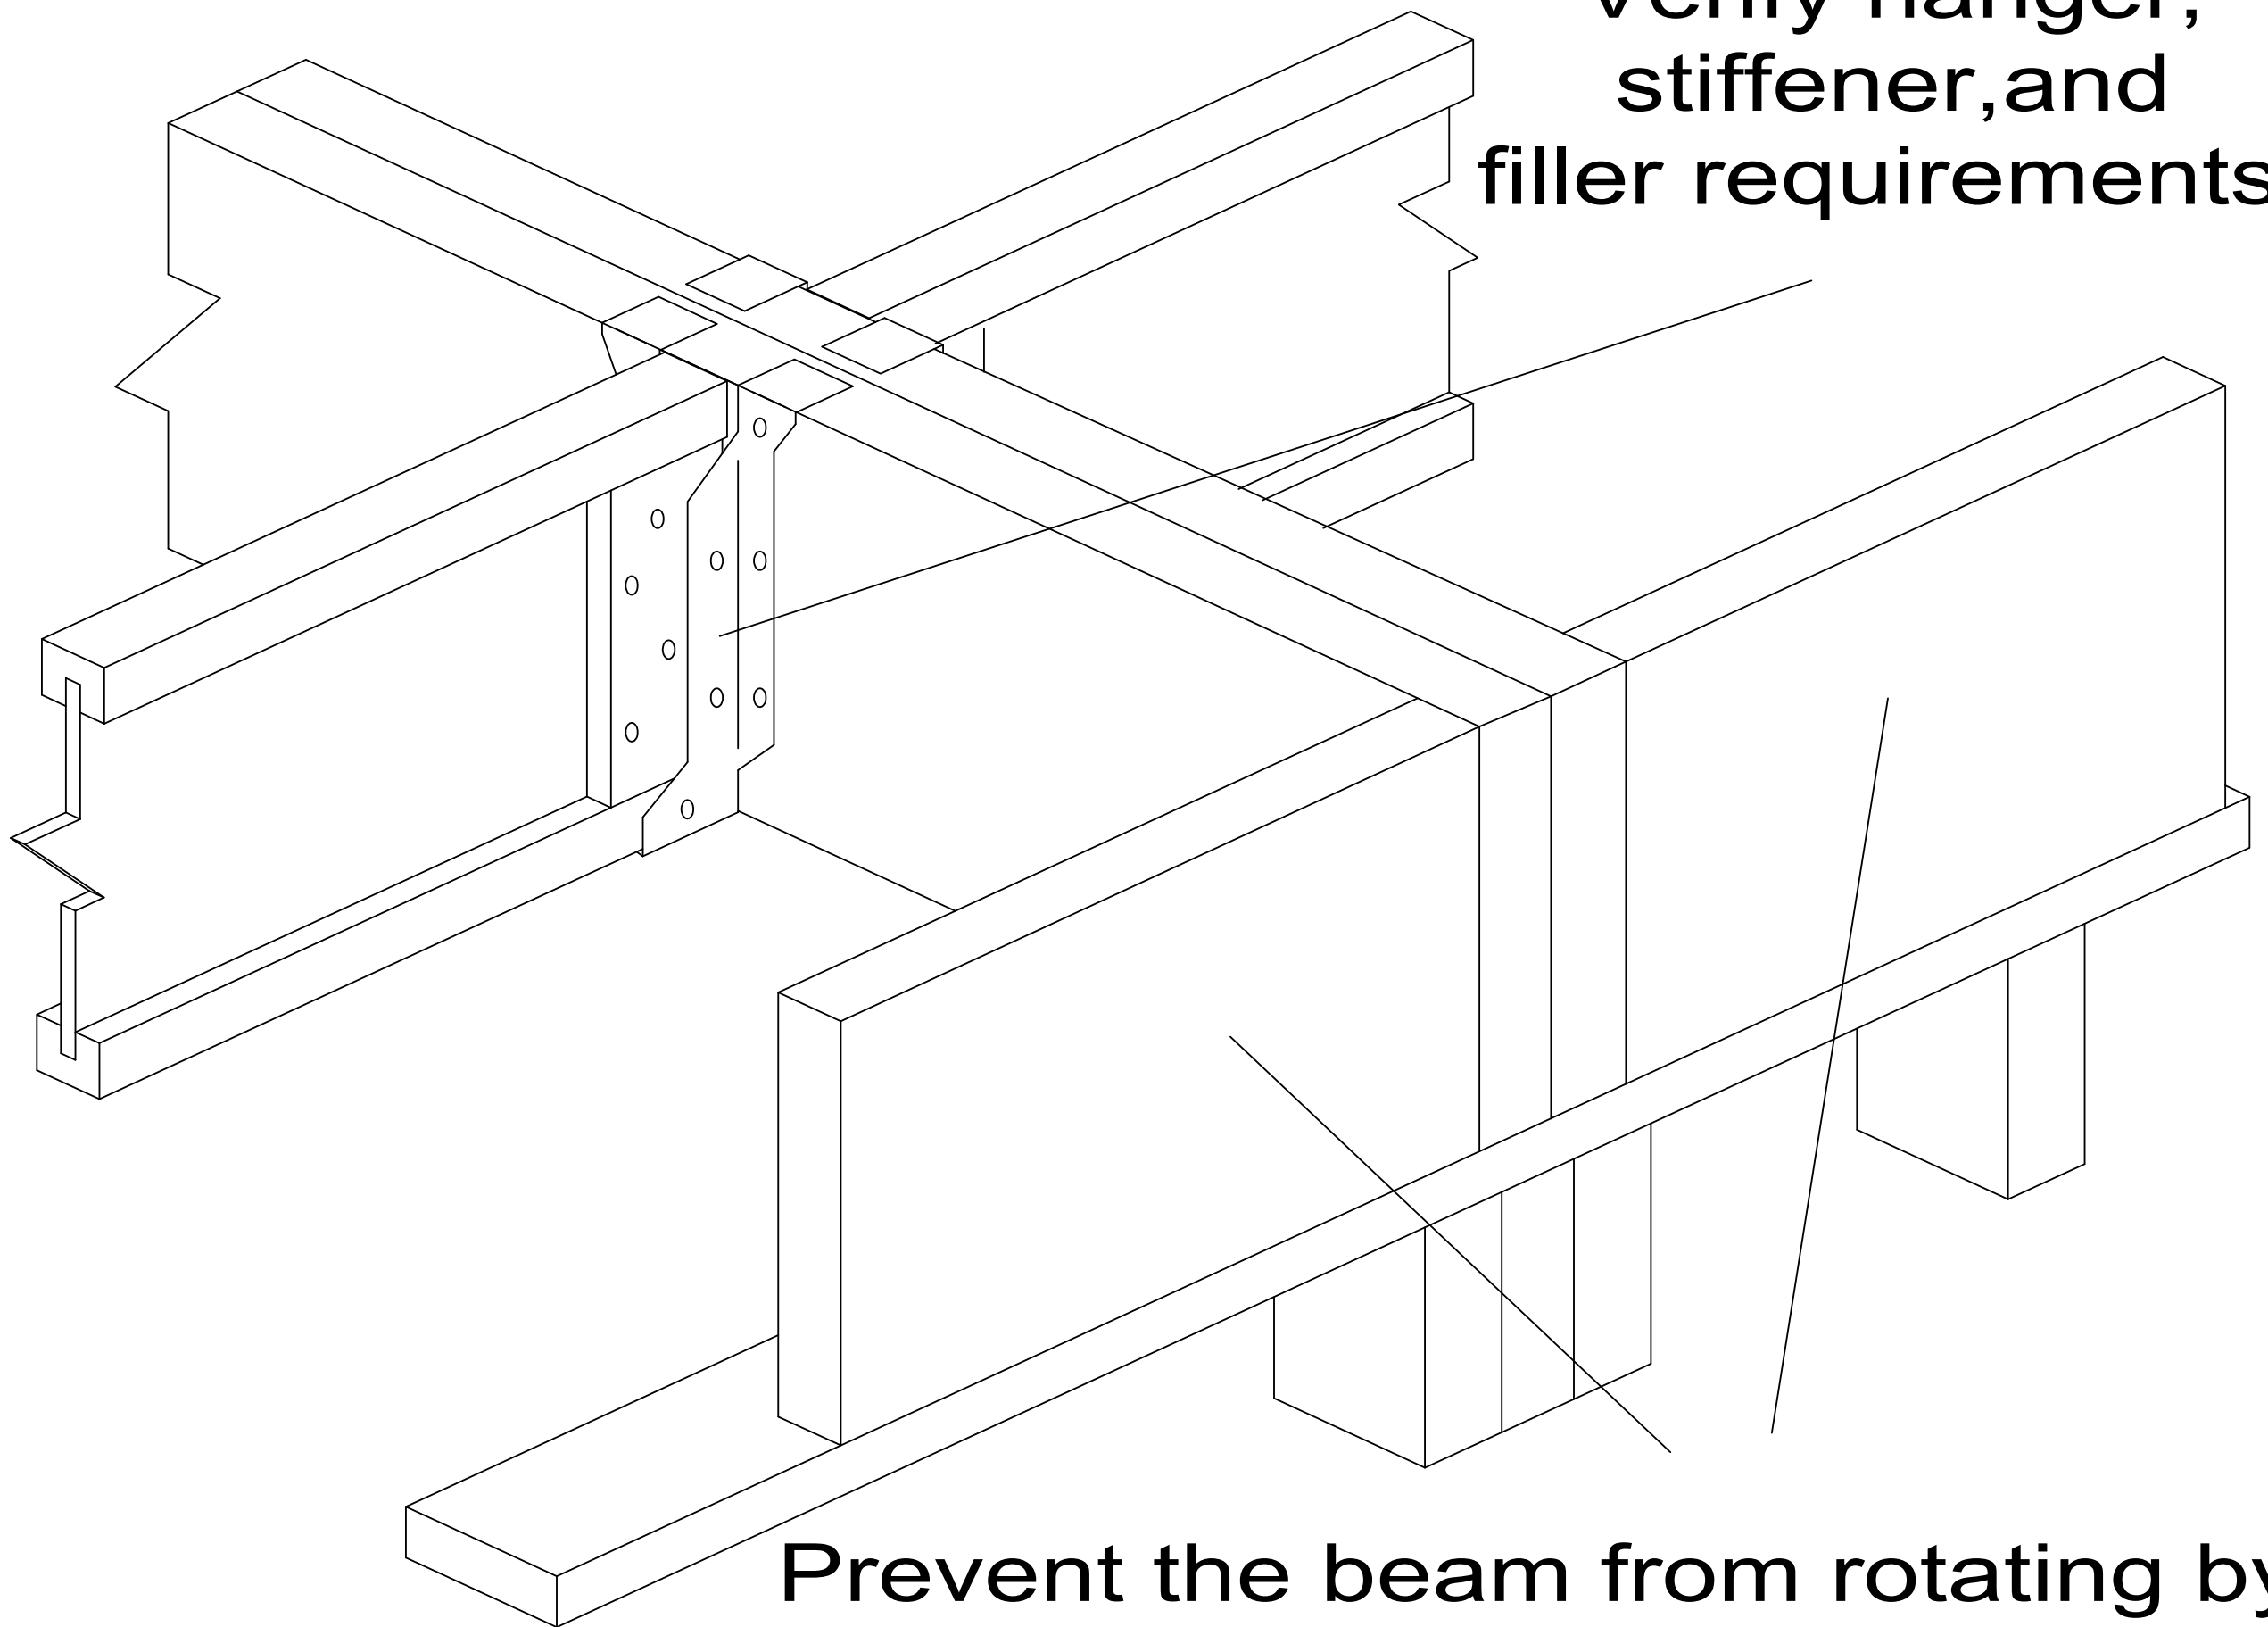

Prevent the beam from rotating by
using rim or blocking

Refer to Connection Assemblies for Multi-Ply
connection information. Side loads are not
recommended for beams over 5-1/2" wide unless
loads are equally applied to both faces.